

OWNERS MANUAL

Specification

TECHNOLOGY

RMS 1ohm:1CH x 3500W

RMS 2ohm:1CH x 2520W

RMS 4ohm:1CH x 1500W

THD: 0.25%

LPF: 80Hz-20kHz

Sub Sonic:10Hz-60Hz

Frequency Response: 10Hz-20kHz

S/N: 83dB

Product Dimension: 280x260x70mm



**COMPETITION
SERIES**

Fig:2 POWER CONNECTOR


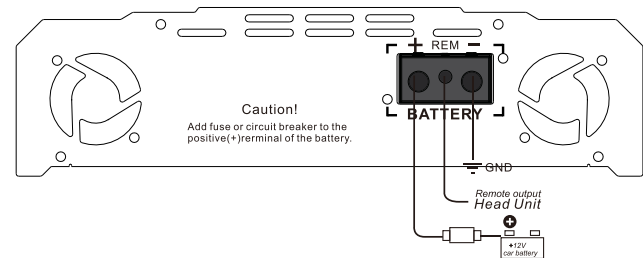


Fig:1

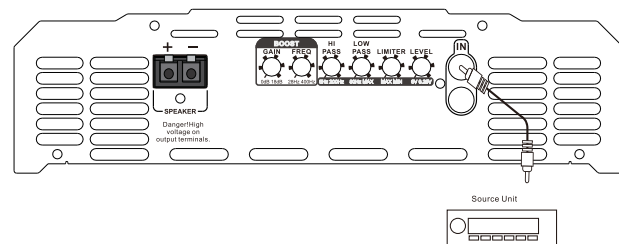

POWER CONNECTION LEADS

Notes on the Power supply

- Connect the 13.8V power supply lead only after all the leads have been connected.
- Be sure to connect the ground lead of unit securely to a metal point of car. A loose connection may cause malfunction of the amplifier.
- Be sure to connect the remote control lead of the head unit to the amplifier's remote terminal, a loose connection may cause malfunction of the amplifier.
- When using a car audio without a remote output on the amplifier, connect the remote terminal to the accessory power supply.
- Place the fuse in the power supply lead as close as possible to the car battery.
- Make sure that the cables to be connected to the 13.8V and the GND terminal of this minimum 0 gauge unit (AWG # 8) power cables..