


## SPECIFICATIONS

Graphic center frequencies:	50Hz, 125Hz, 315Hz, 750Hz, 2.2KHz, 6KHz, 16kHz
Boost/cut:	12dB
S/N ratio:	83dB
Frequency response:	8Hz-140kHz +/-1dB
Maximum output voltage:	15V
THD:	0.01 %
Input sensitivity (RCA)	<3.6V
Input sensitivity (High)	<10.8V
Input impedance:	20KOhms
Output impedance:	1KOhms
Stereo separation:	73dB/1kHz
Operating voltage:	11V-15V negative ground
Size:	7" wide by 4 1/4" deep by 1" high




# USER MANUAL



## 7 BAND Parametric Equalizer



To get the best out of this product and to ensure its correct use, please read the instructions carefully. We recommend you keep this manual handy for future reference or should any problems occur.
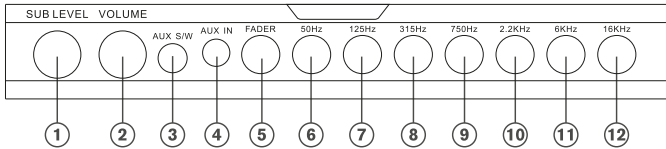
## FRONT PANEL FUNCTION



1. SUB volume adjustment
2. Master volume adjust knob
3. Audio input button
  -  is CD audio input
  -  is AUX audio input
4. inserting the cable will select this AUX input
5. SUB FREQ
6. Master channel 50Hz adjust knob
7. Master channel 125Hz adjust knob
8. Master channel 315Hz adjust knob
9. Master channel 750Hz adjust knob
10. Master channel 2.2KHz adjust knob
11. Master channel 6KHz adjust knob
12. Master channel 16KHz adjust knob

## SYSTEM CONNECTION CHART

